


AMALIE®

Better than it has to be®
Since 1903

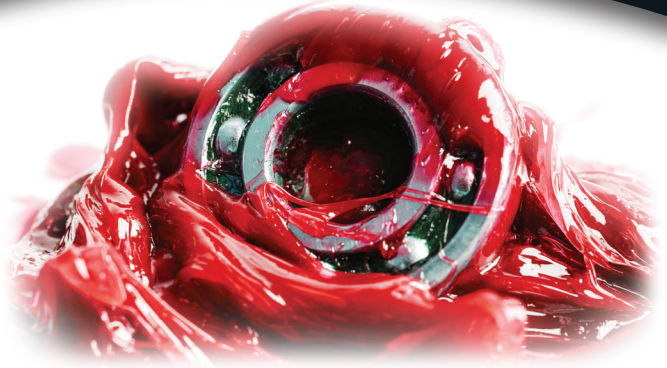

MULTIPURPOSE GREASE #2

BENEFITS:

- » Compounded with Fully Refined Lube Stocks and High-Quality Lithium Soap
- » Excellent Temperature Stability
- » Oxidation and Corrosion Resistant
- » Superior Water Resistance Effectively Resists Washout in All-Weather Service



MADE IN U.S.A.



AMALIE Multi-Purpose Lithium Grease is a lithium thickened automotive and industrial grease possessing good extreme pressure, anti-wear, and strong anti-rust characteristics. **AMALIE Multi-Purpose Lithium Grease** is recommended for the lubrication of water pumps, universal joints and regularly lubricated chassis points on passenger cars, trucks, buses, farm tractors, and mobile construction equipment. Applications include cars, light trucks, SUV's, motorcycles and light trailers equipped with conventional brakes, or industrial applications where an NLGI #2 is requisite.

Additional Information:

Please use proper handling and care that you would use with any lubricating grease. Contact your Sales Representative for SDS.

Please consult AMALIE Technical Services or your local representative for a full listing of applications.

Technical Services: • (800) 368-1264 • techservices@amalie.com

MULTI-PURPOSE LITHIUM GREASE #2

VISCOSITY	PACK SIZE	PART #
NLGI #2	50-14 Ounce	160-68311-91
	12-1 LB	160-68316-93
	35 LB Pail	160-68314-28
	120 LB Keg	160-68310-18
	400 LB Drum	160-68313-08

The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.

Health and Safety

Safety Data Sheets (SDS) are available from your sales representative or at AMALIE.com.

TYPICAL PROPERTIES

Property	Multipurpose Grease #2
Color	Red
Texture	Smooth
NLGI Grade	2
Thickener Type	Lithium Stearate
Solid Lubricant	None
Dropping Point °C / °F	182/360
Timken OK Load Lbs. D-2509	40
Rust Corrosion Test, D-1743	Pass
Emcor Rust, IP220-mod, Distilled Water	0,0
Worked 60 Penetration, D-217	265-295
Copper Strip Corrosion, D-4048	1b Max
Operating Temperatures, °C	-29 to 135