


# AMALIE

Better than it has to be<sup>®</sup>  
Since 1903

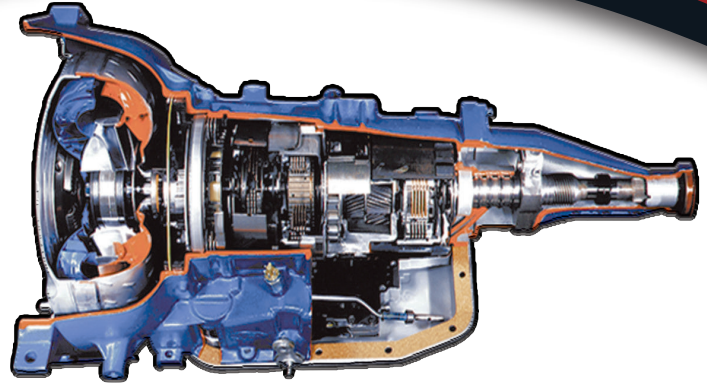

## UNIVERSAL

# SYNTHETIC

## AUTOMATIC TRANSMISSION FLUID

### SYNTHETIC AUTOMATIC TRANSMISSION FLUID

VISCOSITY	PACK SIZE	PART #
UNI. SYNTHETIC ATF	12-1 Quart	160-72866-56
	4-1 Gallon	160-72867-36
	5 Gallon Pail	160-72864-25
	6 Gallon BIB	160-72860-21
	55 Gallon Drum	160-72863-05

Please consult AMALIE Technical Services or your local representative for a full listing of applications.

Technical Services:  
(800) 368-1264  
techservices@amalie.com

**Health and Safety**  
Safety Data Sheets (SDS) are available from your sales representative or at AMALIE.com.



MADE IN U.S.A.



Better than it has to be®  
Since 1903

UNIVERSAL



## AUTOMATIC TRANSMISSION FLUID

**AMALIE Universal Synthetic Automatic Transmission Fluid** is a full synthetic automatic transmission fluid and is now reformulated with even more universal applications in modern traditional Automatic Transmissions. It is by far the most dynamic member of AMALIE's family of high-performance automatic transmission fluids. It is the latest iteration of the fluid that changed the ATF market – the one premium ATF that became known for its rugged dependability, and as the inventory optimizer. With the exception of CVT fluids and Dual Clutch Fluids (DCT), the new **AMALIE Universal Synthetic ATF** will come with broader and more universal coverage for the more traditional planetary-gear transmissions. By separating out the CVT application, AMALIE is able to endorse performance applications for many more European, Korean, Japanese and U.S. heavy-duty transmission applications than ever before – not just the newer and more demanding transmissions, we are now able to recommend AMALIE Oil Company's Universal Synthetic Automatic Transmission Fluid for all conventional automatic transmissions – old and new. It is a special blend of synthetic base oils coupled with a multi-functional additive system and advanced friction modifiers to provide unsurpassed protection and reliable performance for all types of automatic transmissions, power steering units and hydraulic systems manufactured by virtually all of the automotive and transmission manufactures from around the world – the one fluid that replaces the confusion about which fluid to use in a multitude of automatic transmissions.

**AMALIE Universal Synthetic Automatic Transmission Fluid** is such a superior transmission fluid that it may be used wherever established fluids are required or specified by all OEMs around the world including but not limited to General Motors approved Dexron® fluids including Dexron® VI and GM T-IV; Honda ATF-Z1, VTM-4, DW-1, Mercedes Benz, Mitsubishi Diamond SP II, SP III, SP-IV, and Toyota T-IV and WS and many others. Extensive laboratory and field testing has proven this superior automatic transmission fluid meets or exceeds the performance requirements of automatic transmissions manufactured by American, European, Japanese, Korean, and most other vehicle manufactures around the world - it is truly universal and truly the one fluid you can use worldwide.

**AMALIE Universal Synthetic Automatic Transmission Fluid** is compatible with traditional automatic transmission fluids whether used as a top-off or in a complete fluid change. Today's automatic transmission fluids must help vehicles attain improved fuel economy performance, offer better anti-wear performance and much better anti-shudder performance. Because of new, superior, more durable and much more sophisticated state-of-the-art chemistry, AMALIE Oil Company's new and improved Universal Synthetic Automatic transmission fluid offers better anti-shudder durability, better friction stability, better anti-wear protection, better oxidation stability and better low temperature operation than the already great fluid it replaces. AMALIE Oil Company's recent research led to advances in friction modifier technology, and those advances along with a new optimized viscosity formula are some of the reasons we can claim improvements in fuel economy. AMALIE's new robust additive system resists degradation and that, along with improvements in seal swell protection, lead to longer fluid life which is perfect for those so-called filled-for-life transmissions

Some performance levels are limited by viscosity grades. Please consult the Performance Application Chart, the Inspection Data Table for the appropriate product or contact your District Manager for more complete information and recommendations. Consult your District Manager for specific pack sizes and product availability.

The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.



Better than it has to be®  
Since 1903

UNIVERSAL



## AUTOMATIC TRANSMISSION FLUID

Universal Synthetic ATF	SAE Grade	API Gravity	Flash Point, °C	Viscosity cSt @100C	Viscosity cSt @40C	VI	Brookfield Viscosity, cP.	Pour Point, °C
Typical Specifications	OW-20	35.0	190	6.20	29.0	180	<13,000	-51

### PERFORMANCE APPLICATION CHART

\*The chart below lists suitable for use applications

- ATF Type A-Suffix A
- Aisin Warner AW-1, JWS 3309, 3314, 3317, 3324
- Aisin Warner SCS, M315 A-1, T-IV
- Acura ATF-Z1, (VTM-4), ATF Type 3.0
- Allison C-3, C-4,
- Alfa Romeo (all vehicles\*)
- American Motors ATF+3(MS7176-E), ATF+4(MS 9602)
- Audi 5HP (18FL,19FL, 24A, 30), 6HP (1375.4), LT71141
- Audi G-055-025-A2, G-052-162-A1, A2, G-052-990-A2,
- Audi G-055-005-A2, G-055-162-A2, G-060-162-A2
- BMW 83 22 0 397 (114), 83 22 9 400 (272,275)
- BMW Mini 83 22 0 402 413, Mini 83 22 7 542 290
- BMW 83 22 0 403 (248,249), 83 22 0 142 516
- BMW 83 22 2 152 426
- BMW 83 22 9 407 (738, 765, 807,858,859)
- BMW 5HP (18FL,19FL, 24A, 30), 6HP (1375.4), LA2634
- BMW ETL-7045E, ETL-8072B, N402, LT71141
- Caterpillar Power Shift TO-2
- Esso LT 71141 (Daewoo LT 71141)
- Fiat (all vehicles\*), Type T-IV
- GM Dexron® II, II-D, III, III-G, III-H, TASA
- GM Dexron® VI, Dexron® HP, Dexron® ULV
- GM T-IV (Saturn T-IV)
- GM Transfer Fluid 12378515 (Transynd® applications)
- GM Transfer case 12378396
- GM Transfer case 12378508
- Honda ATF-Z1, VTM-4, DW-1, Type 3.0, 3.1
- Hyundai SP-II, SP- III, SP-IV, SPH-IV, NWS-9638,
- Hyundai SPH-IV RR, SP4-M
- Idemitsu K17, Jatco 3100 PL085, ATF Red 1
- Infinity Matic-D, Matic-J, Matic-K, Matic-S, Matic-W
- Isuzu Besco, ATF -II, ATF-III (also see Aisin Warner)
- Jaguar ZF 5HP24, ZF 6HP26, LT71141, JLM20238
- Jaguar M1375.4, ATF 3403 M115, JLM21044
- JASO M315 Type 1-A, 1-A-LV
- Jatco 3100 PL085
- Jeep ATF+3, ATF+4, AS 68 RC (T-IV)
- JWS 3309, JWS 3314, JWS 3317, JWS 3324
- Kia SP-II, SP-III, SP-IV, ATF Red 1 (see JWS)
- Lexus Type T, T-II, T-III, T-IV, WS (JWS 3324)
- MAN 339 A, F, V1, V2, Z1, Z2, Z3
- Mazda ATF-M III, ATF M-3, ATF-MV, F-1, ATF-FZ
- Mazda V (XT-9-QMM5, FNR 5),
- MB 236.1,236.2,236.3,236.5,236.6,236.7,236.81,236.9
- MB 236.10,236.11,236.12(NAG1/2),236.14(Sprinter)
- MB 236.15, 236.17, 236.41, 236.91
- MB 722.3, 722.4, 722.5, 722.6, 722.9
- Mini Cooper T-IV (see also BMW)
- Mitsubishi Diamond SP II, SP III, SP-IV, Dia Queen J2,
- Mitsubishi ATF-J3 / Dia Queen J3 / ATF-PA
- Mopar AS 68 RC (T-IV)
- Nissan Matic-D, Matic-J, Matic-K, Matic-S, Matic-W
- Nissan 402
- Opel 19 40 700, 19 40 707, 19 40 767
- Peugeot ZF 4HP200, AL-4
- Porsche ZF 5HP19FL, ATF 3403-M115, T-IV
- Renault DP-0
- Renk-Doromat
- SAAB JWS 3309, 93 165 146, 93 165 147
- Scion (all vehicles\*)
- Shell 3403, 3353, LA 2634, ATF-134
- Shell M-1375.4, M-1375.5, M-1375.6, Shell L M-12108
- Subaru ATF, AT-HP
- Suzuki ATF 3309, 3314, 3317
- Texaco ETL-7045E, ETL-8072B, N402
- Toyota Type T, T-II, T-III, T-IV. Type D-2
- Toyota WS (JWS 3324)
- Toyota Prius (WS)
- Vickers M-2950-S, I-286-S
- Voith G607 (55.6335.XX) G1363 (55.6336.XX)
- Voith Turbo, ZF, Ecomat, ZF TE-ML 02F, 03D, 04D,
- Voith 05L, 09, 11B, ZF TE-ML 14 A, B, C, 16L, 17C
- Volvo 97340, 97341, 1161521, 1161540, 1161640
- Volvo 1161621, 31256774, 31256675
- Volvo T-IV
- VW 5HP (18FL,19FL, 24A, 30), 6HP (1375.4), LT71141
- VW G-055-025-A2, G-052-162-A1, A2, G-052-990-A2
- VW G-055-005-A2, G-055-162-A2, G-060-162-A2
- VW G 055 540 A2
- VW TL 521 62, TL 52533, G 055 540
- ZF S671 090 255 (6-Speed), 8HP (8-Speed)
- ZF TE-ML 16M, 20B, 20C, 21L, 9HP (9Speed)

\* Not Recommended for Use: CVT (see Universal Synthetic CVT Fluid), DCT

The Universal Synthetic Automatic Transmission Fluid is a dynamic, multi-functional fluid. This product will continue to meet the performance requirements of most worldwide manufactures' transmissions, even if they are not listed above. Please contact your District Manager with specific application questions.

Revision: January 22, 2021

Some performance levels are limited by viscosity grades. Please consult the Performance Application Chart, the Inspection Data Table for the appropriate product or contact your District Manager for more complete information and recommendations. Consult your District Manager for specific pack sizes and product availability.

The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.



Better than it has to be®  
Since 1903

UNIVERSAL



## AUTOMATIC TRANSMISSION FLUID

### TRANSFER CASES

- Ford Mercon V
- Ford M
- Ford XL-12
- GM IID, IIIH
- GM Auto Trak II (12378508)
- GM Transfer Fluid 12378515 (Transynd®)
- GM Transfer case 12378396
- Mercedes GL-450 (ATF 3403)
- Toyota/Lexus (75W-90/80W-90)

### POWER STEERING

- Acura P/N08206-9002A
- Audi P/N G00200 (Pentosin CHF 7.1)
- Audi P/N G002012 Pentosin CHF 11S)
- Chrysler MS-1872, MS-5931, P/N 04883077
- Chrysler MS-9602, MS-10838, P/N 05142896AA
- Ford M2C195-A, M2C204-A
- GM P/N 89021184, 1052884(GM 9985010)
- GM P/N 12345866 (GM 9985835)
- Honda P/N 08206-9002A, PSF-2, PSF Type S
- Honda PSF Type V
- Hyundai PSF-3
- Kia PSF-3
- Mercedes Benz 236.3 (P/N 000 989 88 03)
- Mercedes Benz 345.0 (P/N 001 989 24 03)
- Mitsubishi PS Fluid, Diamond SP-III
- Nissan PSF-II
- Pentosin CHF 7.1, CHF 11S, CHF 202
- Saab P/N 45 30 09 800
- Saab P/N 30 32 380 (Pentosin CHF 11S)
- Subaru P/N K0209A0080
- Toyota PSF Type EH P/N 008886-01
- VW Audi P/N G00200 (Pentosin CHF 7.1),
- VW P/N G002012 Pentosin CHF 11S)
- Volvo P/N 1161529 (Pentosin CHF 11S)
- ZF TE-ML 09

Some performance levels are limited by viscosity grades. Please consult the Performance Application Chart, the Inspection Data Table for the appropriate product or contact your District Manager for more complete information and recommendations. Consult your District Manager for specific pack sizes and product availability.

The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.