


AMALIE®

Better than it has to be®
Since 1903

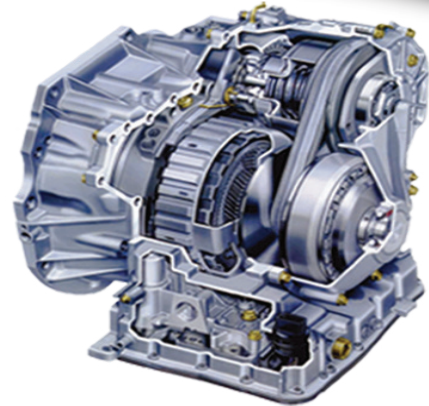

UNIVERSAL

SYNTHETIC

CVT CONTINUOUSLY VARIABLE TRANSMISSION FLUID

SYNTHETIC TRANSMISSION FLUID

VISCOSITY	PACK SIZE	PART #
UNI. SYNTHETIC CVT	12-1 Quart	160-72886-56
	55 Gallon Drum	160-72883-05

Please consult AMALIE Technical Services or your local representative for a full listing of applications.

Technical Services:
(800) 368-1264
techservices@amalie.com

Health and Safety
Safety Data Sheets (SDS) are available from your sales representative or at AMALIE.com.



MADE IN U.S.A.



Better than it has to be®
Since 1903



AMALIE Universal Synthetic CVT Fluid is new technology, for a more powerful and more robust stand-alone Universal Synthetic CVT Fluid. As manufacturers began introducing the CVT into larger and more powerful vehicles; and as newer, more challenging CVT transmissions have been introduced into the marketplace, it became apparent that AMALIE Oil Company had to take the bull by the horns and develop new, world-class CVT fluids that would meet all global CVT applications. The new **AMALIE Universal Synthetic CVT Fluid** is just such a product. It has been engineered to provide “Stay-In-Grade” viscosity, excellent oxidation stability, anti-wear and extreme pressure protection. Coupled with great new and improved seal-swell protection as well as superior wet clutch performance, this new technology gives the fluid wonderfully improved anti-shudder durability when compared with other CVT fluids.

AMALIE Universal Synthetic CVT Fluid is designed for the new CVT transmissions, whether chain or belt, that need a fluid that protects against metal-to-metal wear that leads to belt or chain deterioration. This new CVT fluid is engineered to offer the highest level of protection against metal-to-metal wear. Actual side-by-side tests prove that AMALIE’s new fluid technology outperforms OEM CVT fluids and allows AMALIE to claim better protection against scuffing than many of these OEM fluids. Better anti-shudder performance and better anti-scuffing performance leading to longer life for transmissions, and quieter, more vibration-free operation. Like its big brother, AMALIE Universal Synthetic Automatic Transmission Fluid, the new **AMALIE Universal Synthetic CVT Fluid** takes the guesswork out of which CVT fluid to use in any CVT application; it is the most universal CVT fluid on earth and may be used in more applications than any other CVT fluid – one single fluid with superior technology for all CVT applications.

Universal Synthetic CVT Transmission Fluid	SAE Grade	API Gravity	Flash Point, °C	Viscosity cSt @100C	Viscosity cSt @40C	VI	Brookfield Viscosity, cP.	Pour Point, °C
Typical Specifications	OW-20	34.0	190	7.2	33.0	180	<10,000	-51

PERFORMANCE APPLICATION CHART

*The chart below lists suitable for use applications

- Audi : TL 52180; G052 180 A2; G052 516 A2
- BMW : 83 22 0 136 376; 83 22 0 429 154 (EZL 799A)
- Chrysler : CVTF+4
- Daihatsu : Amix CVTF-DC; Amix CVTF-DFE; Fluid TC
- Dodge / Jeep : NS-2; CVTF+4/MOPAR CVTF+4
- Ford : CVT WSS-M2C-933-A / XT-7QCFT
- Ford : CFT23; CFT30 / Mercon C; WSS-M2C928-A
- Fujijyuuko : i-CVTF FG
- GM/Saturn : DEX-CVT
- Honda : Multimatic Fluid (HMMF); HCF-2
- Hyundai / Kia : SP-CVT-1
- Lexus : Fluid TC; Fluid FE
- Nissan : NS-1; NS-2; NS-3
- Mazda : CVTF 3320
- Mercedes Benz : CVT28 / MB 236.20
- Mini Cooper : EZL 799A / ZF CVT V1
- Mitsubishi : DiaQueen CVTF-J1; DiaQueen CVTF-J4
- Punch : EZL 799A
- Shell : Green 1V
- Subaru : i-CVTF; Lineartronic CVTF; K0425Y0710
- Subaru : CV-30; e-CVTF; Lineartronic CVTF-II
- Suzuki : CVTF 3320; TC; NS-2; CVTF Green 1; CVTF Green 2
- Toyota : Fluid TC; Fluid FE
- Volvo : CVT 4959
- VW : TL 52180, G 052 180 A2; G 052 516

*Not recommended for use in hybrid CVT transmissions including the Toyota Prius and Ford Escape. Refer to the Universal Synthetic ATF for these applications.

The Universal Synthetic CVT Fluid is a dynamic, multifunctional fluid. This product may meet the performance requirements of other worldwide manufacturers’ CVT transmissions, even if they are not specifically listed above. Please contact your District Manager with any application questions.

Some performance levels are limited by viscosity grades. Please consult the Performance Application Chart, the Inspection Data Table for the appropriate product or contact your District Manager for more complete information and recommendations. Consult your District Manager for specific pack sizes and product availability.

The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.