




CHAINSAW BAR & CHAIN OIL

Professional Quality

BENEFITS:

- » Excellent Protection for Your Chainsaw Bar and Chain
- » Tackiness Agent to Reduce "Oil Sling"
- » Provides Rust and Corrosion Protection
- » Robust Formulation for Heavy Duty Applications

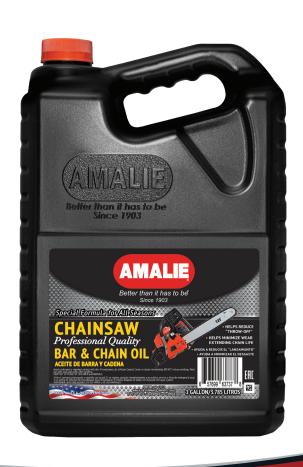







AMALIE Bar and Chain is formulated from quality base oils and engineered to improve lubrication, rust protection, anti-wear characteristics and oxidation resistance over a wide range of temperatures. This product contains special tackiness agents to improve chain and bar life and control oil "sling". It is recommended for use in all chainsaws using either hand-operated or automatic chain-oilers to lubricate the chain, bar and sprocket.

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

| Bar and Chain | Typical Results |
|---------------------------|-----------------|
| Density @ 15.6°C | 7.38 lbs/gal |
| Specific gravity @ 15.6°C | 0.886 |
| SAE Grade | 40 |
| Flash Point (PMCC), °C | 250 |
| Pour Point, °C | 12 |
| Tacky | Yes |

Typical values are listed. Variations not affecting the performance of this fluid may occur during production; however, these variations will not fall outside of set specification parameters.

APPLICATIONS:

Chainsaws or equipment employing link chains.

Please consult AMALIE Technical Services or your local representative for a full listing of applications.

Technical Services: • (800) 368-1264 • techservices@amalie.com

BAR & CHAIN OIL

| VISCOSITY | PACK SIZE | PART # |
|-----------|------------|--------------|
| | 4-1 Gallon | 160-63737-36 |

Health and Safety

Safety Data Sheets (SDS) are available from your sales representative or at AMALIE.com.

Always refer to your vehicles operating manual to select the correct grade of oil for your engine. The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.