



AMALIE

Better than it has to be[®]
Since 1903

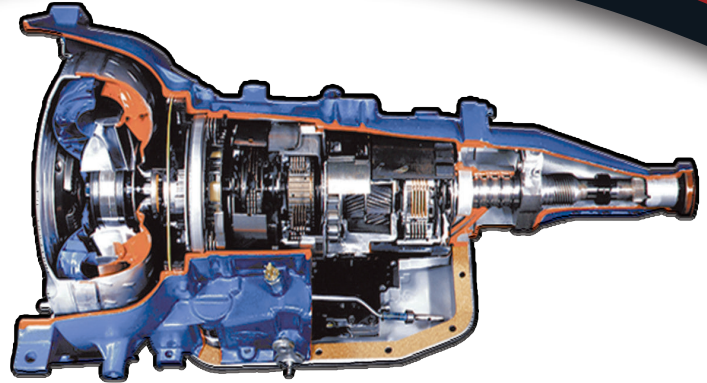

DX III-H/M ATF



AUTOMATIC TRANSMISSION FLUID

BENEFITS:

- » Prevents Corrosion
- » Controls Foam
- » Safe for Seals
- » Promotes Smooth Shifting



MADE IN U.S.A.



DX III-H/M ATF

AUTOMATIC TRANSMISSION FLUID

AMALIE DX III-H/M ATF is formulated for older model Ford and General Motors vehicles requiring MERCON®, DEXRON-I®, DEXRON-II® and DEXRON-III®. It is recommended for use in all transmissions, hydraulic systems, and power steering units manufactured by American, European, Korean, Japanese and other manufactures from around the world specifying DEXRON®III / MERCON® and earlier DEXRON® / MERCON® type transmission fluids.

Check owner's manual for specific recommendations.

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

Kinematic Viscosity @100°C, cSt.....	7.2
Kinematic Viscosity @40°C, cSt.....	34.5
Viscosity Index.....	170
Color	Red (6.5)
Specific Gravity).....	0.860
Flash Point, °C.....	200
Pour Point, °C.....	-48
Brookfield Viscosity @(-40°C) cP.....	<20,000
Copper Corrosion.....	1b

Typical values are listed. Variations not affecting the performance of this fluid may occur during production; however, these variations will not fall outside of set specification parameters.

Please consult AMALIE Technical Services or your local representative for a full listing of applications.

Technical Services: • (800) 368-1264 • techservices@amalie.com

AUTOMATIC TRANSMISSION FLUID

VISCOSITY	PACK SIZE	PART #
DX-III H/M	12-1 Quart	160-72836-56
	4-1 Gallon	160-72837-36
	5 Gallon Pail	160-72834-25
	6 Gallon BIB	160-72830-21
	55 Gallon Drum	160-72833-05

The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.

Health and Safety

Safety Data Sheets (SDS) are available from your sales representative or at AMALIE.com.

APPLICATION CHART

SPECIFICATIONS	DX III-H/M ATF
DEXRON®, DEXRON® II, III H	✓
MERCON®	✓
Allison C3, C4, TES 389B	✓
Caterpillar TO-2	✓
Volvo 97341	✓
MB (Where DEXRON III type fluids are specified)	✓
MAN (Where DEXRON III type fluids are specified)	✓
ZF TE-ML 14A, O4D, 17C, O3D	✓
VOITH H55.6355.XX	✓
Power Steering Units **	✓

** Calling for a fluid listed in the above table.

ADDITIONAL INFORMATION:

Please use proper handling and care that you would use with any motor oil. Contact your Sales Representative for SDS.